


Tk Certified Olimpeak™ Robotic Syringe Filters

New Certified AUTOMATIC OlimPeak Filter for automatic equipments Sotax and Zymark

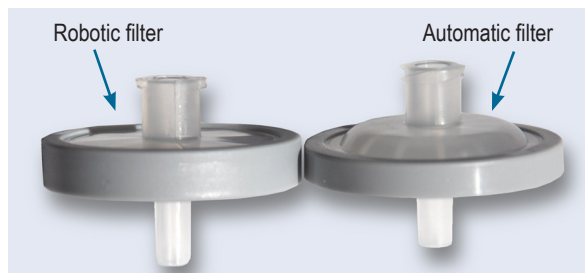


Automatic filter difference

- This filter units are the newest development of Teknokroma filter for automatic equipments.
- The design of this filter is the same than the Robotic Filter except that the upper side is vault shaped.
- The inlet is a female luer Screw ant the outlet is a male luer Minispike.

Certified Olimpeak™ Filters for Automatic Equipments

Reference	Membrane	Pore	Housing	Pk
TR-200000A	Fiber Glass	1.00 µm	PP	1000
TR-200006A	Fiber Glass	2.00 µm	PP	1000
TR-200007A	Fiber Glass	5.00 µm	PP	1000
TR-200100A	Nylon	0.45 µm	PP	1000
TR-200102A	PTFE	0.45 µm	PP	1000
TR-200104A	M.E.Cellulose	0.45 µm	PP	1000
TR-200106A	PVDF	0.45 µm	PP	1000
TR-200111A	Polypropylene	0.45 µm	PP	1000
TR-200440A	Regenerated Cellulose	0.45 µm	PP	1000
TR-200406A	Cellulose Acetate	0.45 µm	PP	1000
TR-200401A	Polyethersulfone	0.45 µm	PP	1000
TR-200100GA	Nylon/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200102GA	PTFE/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200111GA	PP/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200445GA	RC/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200104GA	M.E.C/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200106GA	PVDF/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200406GA	CA/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200401GA	PES/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200480GA	NC/Glass fibre 1 µm	0.45 µm	PP	1000

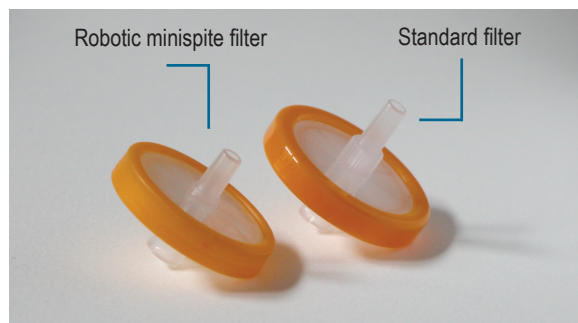

Robotic filter difference

Certified Olimpeak™ Filters for Robotic Equipments Zotax and Zymark

- Teknokroma has developed new filters to use with robotic apparatus
- They are available in 25 mm D.
- The inlet is a female "Luer Lock" and the outlet is a male luer "Minispike".
- Pore size is 0.45 or 0.20 µm for the following membranes: Nylon, PVDF, PTFE, M.E. Cellulose, PP, Regenerated Cellulose, Cellulose Acetate Nitrocellulose, PES
- For the Glass Microfibre, the pore size is 1.0 µm
- The robotic filters are under strict quality control for reliable performance.
- Each pack contains 1000 units.
- All these filters can be adapted to automatic equipments as Sotax, Zymark, etc.
- The Glass membrane is the good choice for dissolution test.

Reference	Membrane	Pore	Housing	Pk
TR-200000R	Fiber Glass	1.00 µm	PP	1000
TR-2-200006R	Fiber Glass	2.00 µm	PP	1000
TR-2-200007R	Fiber Glass	5.00 µm	PP	1000
TR-200100R	Nylon	0.45 µm	PP	1000
TR-200102R	PTFE	0.45 µm	PP	1000
TR-200104R	M.E.Cellulose	0.45 µm	PP	1000
TR-200106R	PVDF	0.45 µm	PP	1000
TR-200111R	Polypropylene	0.45 µm	PP	1000
TR-200440R	Regenerated Cellulose	0.45 µm	PP	1000
TR-200406R	Cellulose Acetate	0.45 µm	PP	1000
TR-200401R	Polyethersulfone	0.45 µm	PP	1000
TR-200100GR	Nylon/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200102GR	PTFE/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200111GR	PP/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200445GR	RC/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200104GR	M.E.C/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200106GR	PVDF/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200406GR	CA/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200401GA	PES/Glass fibre 1 µm	0.45 µm	PP	1000
TR-200480GA	NC/Glass fibre 1 µm	0.45 µm	PP	1000